


# Product Data Sheet - Step Edge Contrast E14-075

2023 V1

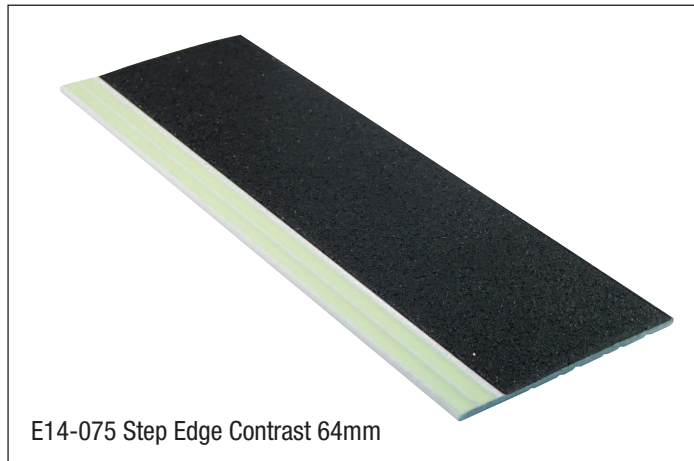

E14-075 Step Edge Contrast 64mm

The E14-075 Step Edge Contrast is designed to ensure visibility of steps in escape routes for compliance with International Fire Code (IFC), and any performance based building codes. The Step Edge Contrast will be effective in all light conditions including during failure of the main lighting.

## COMPLIANCE

Tested to UL 1994 specifications to meet IFC. This product has also been independently tested for use in Performance Solutions to meet the performance requirements of any performance based building codes.

The Step Edge Contrast is suitable for use indoors and outdoors. The anti-slip material provides all weather protection from slips and falls.

**Operating Temperature Range:** -20°C to +40°C\*

\*For controlled environment (constant temperature) rooms below 0°C contact Ecoglo.

**Anti-slip Properties** – UL410 Standard for Slip Resistance for Floor Surface Materials

AS/NZS 4586-2004 Classification: Dry: F Wet: V Ramp: R12

AS 4586-2013 Classification: P5

**UV Resistance** - Loss of luminance after 1000 hrs ASTM G-155 Cycle 1 exposure: <10%

**Salt Spray Resistance** – ASTM B117: Pass

**Washability** – ASTM D4828: Pass

**Rate of Burning** – ASTM D635: Pass

**Surface Flammability** - ASTM E162: Pass


**Toxicity** - Bombardier Toxic Gas Generation Test SMP800-C: Pass

**Radioactivity** - ASTM D3648: Pass

**High Temperature Curing:** Pass

## SUPPLY

The products are available in 100mm increments from 800mm to 1500mm to comply with IBC recommendations to mark the escape path on the front edge of the step to within 50mm of the wall or the side of the step. Custom lengths can also be fabricated on site from 2.45 metre and 3.06 metre lengths.

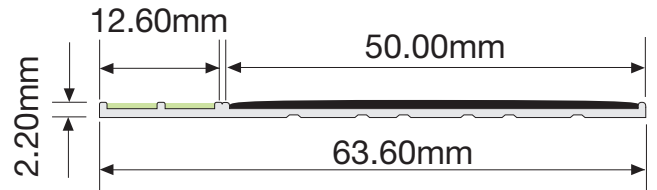

## COMPOSITION

Ecoglo E14-075 Step Edge Contrast is manufactured from extruded 60605T aluminium section. Silicon Carbide anti-slip materials and custom made photoluminescent pigment are embedded in thermoset polyester carriers to integrally bond the active ingredients into the aluminium following curing at high temperature. The photoluminescent area is also recessed into protective channels.



## INSTALLATION

Indoors the E14-075 Step Edge Contrast can be surface mounted on all smooth surfaces. Outdoors the E14-075 Step Edge Contrast can be surface mounted onto concrete.

Maximum recommended length for outdoor installation is 1500mm.

Installation needs to be carried out strictly in accordance with the Ecoglo installation instructions.

Consult Installation Instructions on website for full details and surface preparation.

Screws can be used if adhesion is difficult.

*(See order codes below for the product that best suits).*

**E14-075** For polyurethane adhesive fixing

**E14-075P** Punched for screw fixing

| PRODUCT CODE | PRODUCT DESCRIPTION     | PRODUCT LENGTH |
|--------------|-------------------------|----------------|
| E14-075-800  | Step Edge Contrast 64mm | 800mm          |
| E14-075-900  | Step Edge Contrast 64mm | 900mm          |
| E14-075-1000 | Step Edge Contrast 64mm | 1000mm         |
| E14-075-1100 | Step Edge Contrast 64mm | 1100mm         |
| E14-075-1200 | Step Edge Contrast 64mm | 1200mm         |
| E14-075-1300 | Step Edge Contrast 64mm | 1300mm         |
| E14-075-1400 | Step Edge Contrast 64mm | 1400mm         |
| E14-075-1500 | Step Edge Contrast 64mm | 1500mm         |

## Contact

### Ecoglo Fire Protection Product Trading

**Address:** 36-C Gloria Street, Barangay San Carlos, Binangonan Rizal 1940, Philippines

**Office:** +632-8802-4760

**Cell:** +63917-514-6803

+63968-356-4773

**Email:** keith.phillips@ecoglo.com

**Web:** www.ecoglo.ph www.EcogloAsia.com www.EcogloVenues.com